



SERIES: TECHLINE  
 MODEL NUMBER: TS204  
 DESCRIPTION: FOUR PANEL, 2 LAMP, SURFACE MOUNT CONFIGURATION

FRONT VIEW

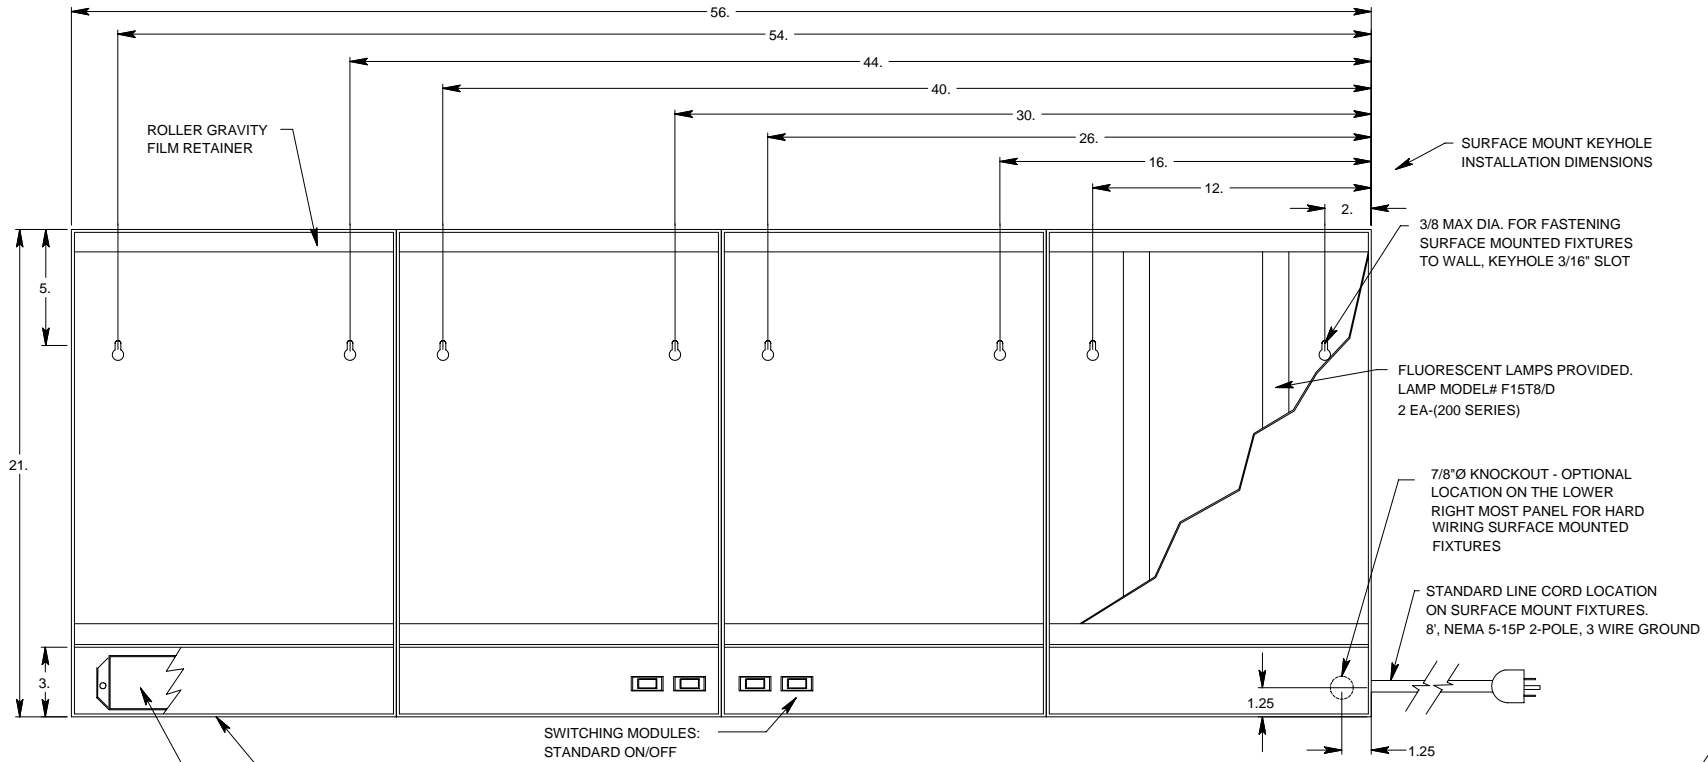

RIGHT SIDE

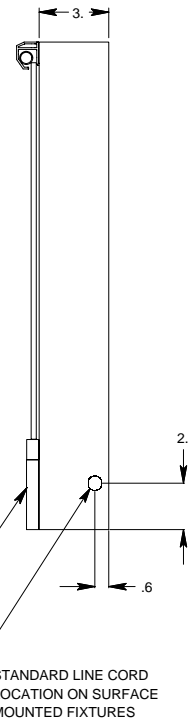

(1) BALLAST PER PANEL:  
 RAPID START, LOW LEAKAGE  
 THERMALLY PROTECTED  
 CLASS P TYPE  
 200 SERIES-0.72 AMPS/PANEL  
 PN - 1039U

BODY IS STANDARD  
 18 GAUGE WELDED  
 STEEL CONSTRUCTION

SWITCHING MODULES:  
 STANDARD ON/OFF

SURFACE MOUNT KEYHOLE  
 INSTALLATION DIMENSIONS

3/8 MAX DIA. FOR FASTENING  
 SURFACE MOUNTED FIXTURES  
 TO WALL, KEYHOLE 3/16" SLOT

FLUORESCENT LAMPS PROVIDED.  
 LAMP MODEL# F15T8/D  
 2 EA-(200 SERIES)

7/8"Ø KNOCKOUT - OPTIONAL  
 LOCATION ON THE LOWER  
 RIGHT MOST PANEL FOR HARD  
 WIRING SURFACE MOUNTED  
 FIXTURES

STANDARD LINE CORD LOCATION  
 ON SURFACE MOUNT FIXTURES.  
 8', NEMA 5-15P 2-POLE, 3 WIRE GROUND

STANDARD REMOVABLE  
 ACCESS WIREWAY PANEL

STANDARD LINE CORD  
 LOCATION ON SURFACE  
 MOUNTED FIXTURES